


# TD-9322E3

## 2MP Starlight Box Network Camera



- 2MP ( 1920 × 1080 ) @30fps
- Support smart H.265/H.264 coding
- Starlight
- ICR auto switch, true day&night vision
- 3D DNR, true WDR, HLC, BLC and ROI coding
- Support corridor mode
- Support image distortion correction
- Built-in micro SD card slot, up to 256GB
- 1CH audio input; 1CH audio output; 1CH built-in MIC
- 2CH alarm input; 2CH alarm output
- AC24V/DC12V/PoE power supply
- Support three streams
- P2P function optional
- Support mobile surveillance by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics

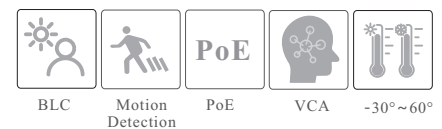

[en.tvt.net.cn](http://en.tvt.net.cn)


For more information, please visit our website

### SPECIFICATIONS


Specifications	Model	TD-9322E3
<b>Camera</b>		
Image Sensor		1 / 2.8 "CMOS
Image Size		1920 × 1080
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Iris Type		DC Iris
Min. Illumination		Color: 0.0028 lux@F1.2,AGC ON B&W:0.002 lux@F1.2,AGC ON
Lens Mount		CS
Day & Night		ICR
Wide Dynamic Range		120dB
BLC		Yes
HLC		Yes
Defog		Yes
Digital NR		3D DNR
<b>Image</b>		
Video Compression		Main stream: Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard		Baseline Profile/Main Profile/High Profile
Resolution		1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
Main Stream		60Hz:1080P/720P(1~30fps); 50Hz:1080P / 720P( 1~25fps )
Sub Stream		60Hz:720P/D1/CIF/480×240 (1~30fps); 50Hz:720P/D1/CIF/480×240 (1~25fps)
Third Stream		60Hz:D1/CIF/480×240 (1~30fps); 50Hz:D1/CIF/480×240 (1~25fps)
Bit Rate		64 Kbps ~ 6 Mbps
Bit Rate Type		VBR / CBR
Audio Compression		G711A / U
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
<b>Interfaces</b>		
Network		RJ 45
Video Output		CVBS output (BNC × 1)
Audio		1CH audio input; 1CH audio output; 1CH built-in MIC
Storage		Built-in micro SD card slot; up to 256GB
Reset		Yes
Alarm		2CH alarm input; 2CH alarm output
RS 485		Yes
<b>Intelligent Analytics (Smart Events)</b>		
Perimeter Protection		Line crossing, region entrance/exiting/intrusion (human/motor vehicle/non-motor vehicle classification)
Target Counting		Line crossing human/motor vehicle/non-motor vehicle counting
Exception Detection		Scene change, video blur and video color cast detection
Face Detection		Face detection and face capture
<b>Functions</b>		
Remote Monitoring		Web browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol		UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, ICMP, IGMP, FTP, PPPoE, DDNS, SMTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol		ONVIF
Storage		Network remote storage; micro SD card storage
Smart Alarm		Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection
General Function		Watermark, IP address filtering, video mask, heartbeat, password protection, image distortion correction

PoE	Yes, IEEE802.3af
<b>Others</b>	
Power Supply	AC24V/DC12V/PoE
Power Consumption	< 11W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions ( mm )	160.8 × 79 × 64
Weight ( net )	Approx. 0.65KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

### DIMENSIONS

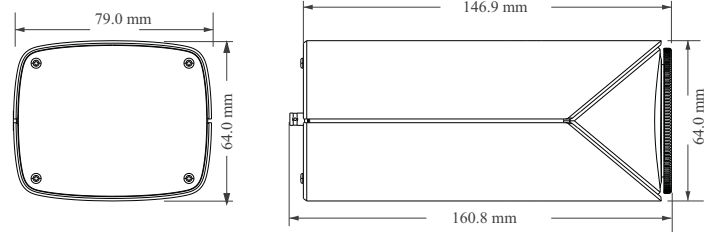

### AVAILABLE ACCESSORIES

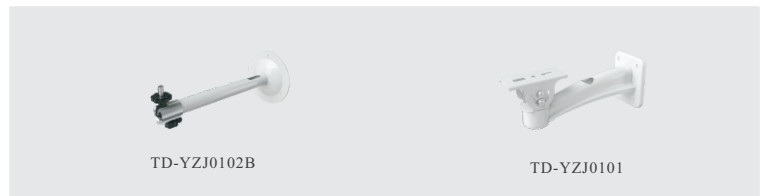

### AVAILABLE MODEL

Available Model	TD-9322E3 ( D / PE )
-----------------	----------------------