

CAMERA

# TD-9322S2H

## 2MP Network Starlight Box Camera



- 2MP ( 1920 × 1080 ) H.265 full real time coding
- Max. resolution: 1920 × 1080; ICR auto switch, true day / night
- Starlight
- 3D DNR, Digital WDR, HLC, BLC, Defog and ROI coding
- Support 1CH alarm input; 1CH alarm output
- Support RS485
- Support hardware reset
- Support SD card slot, up to 128GB
- AC24V/DC12V/PoE power supply
- Support dual streams
- Support mobile surveillance by smart phones with iOS and Android OS



en.tvt.net.cn

For more information, please visit our website

**Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.**

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)

### SPECIFICATIONS


Specifications	Model	TD-9322S2H
<b>Camera</b>		
Image Sensor		1/2.8"CMOS
Image Size		1920 × 1080
Electronic Shutter		1/25 s ~ 1/100000 s
Iris Type		Auto IRIS; DC drive
Min. Illumination		Color: 0.005 lux@F1.6,AGC ON; B&W: 0.0004 lux@F1.6, AGC ON Color: 0.0028 lux@F1.2,AGC ON; B&W: 0.0002 lux@F1.2, AGC ON
Lens Mount		C/CS
Wide Dynamic Range		Digital WDR
BLC		Yes
HLC		Yes
Defog		Yes
Digital NR		3D DNR
<b>Image</b>		
Video Compression		Main stream: H.265 / H.264; Sub stream: H.265 / H.264 / MJPEG
H.264 Compression Standard		Baseline Profile/Main Profile/High Profile
Resolution		1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
Main Stream		60Hz : 1080P( 1 ~ 30fps ) / 720P( 1 ~ 30fps ) 50Hz : 1080P( 1 ~ 25fps ) / 720P( 1 ~ 25fps )
Sub Stream		60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)
Bit Rate		128 Kbps ~ 4 Mbps
Bit Rate Type		VBR / CBR
Audio Compression		G711A / U
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
<b>Interfaces</b>		
Network		RJ45
Alarm		1CH alarm input; 1CH alarm output
RS 485		Yes
Storage		Support SD card slot; up to 128GB
Hardware Reset		Yes
<b>Functions</b>		
Remote Monitoring		Web browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol		UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, 802.1x, UPnP, HTTPS, HTTP, QoS
Interface Protocol		ONVIF, GB-T/28181-2016
Storage		Network remote storage; SD card storage
Smart Alarm		Motion detection, SD card error, SD card full
General function		Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE		Yes
<b>Others</b>		
Power Supply		AC24V/DC12V/PoE
Power Consumption		< 4W

Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions ( mm )	138.4 × 70 × 60.5
Weight ( net )	Approx. 0.39KG
Installation	Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

### DIMENSIONS

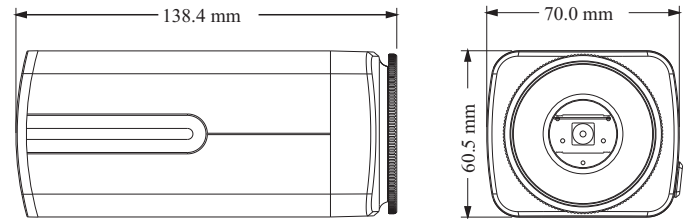

### AVAILABLE ACCESSORIES

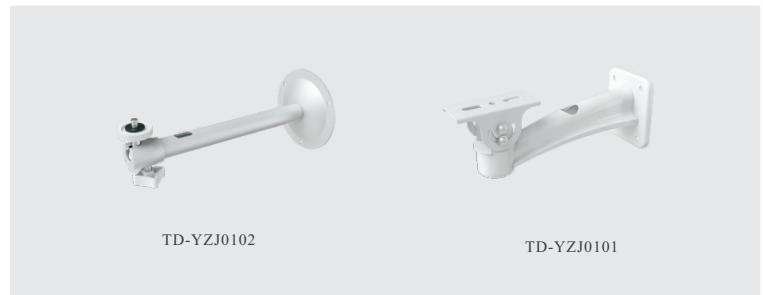

### AVAILABLE MODEL

Available Model	TD-9322S2H(D/PE)
-----------------	------------------