

CAMERA

TD-9322S3H

2MP Network Starlight Box Camera



- 2MP (1920 × 1080) H.265 full real time coding
- Max. resolution: 1920 × 1080; ICR auto switch, true day / night
- Starlight
- 3D DNR, Digital WDR, HLC, BLC, Defog and ROI coding
- Support 1CH alarm input; 1CH alarm output
- Support RS485
- Support 1CH audio input; 1CH audio output
- Support SD card slot, up to 128GB
- AC24V/DC12V/PoE power supply
- Support dual streams
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent Analytics: video blur detection, line crossing detection, intrusion detection



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: overseas@tvt.net.cn

SPECIFICATIONS


Specifications	Model	TD-9322S3H
Camera		
Image Sensor		1/2.8"CMOS
Image Size		1920 × 1080
Electronic Shutter		1s ~ 1/100000 s
Iris Type		Auto IRIS; DC drive
Min. Illumination		Color: 0.0028 lux@F1.2, AGC ON; B&W: 0.0002 lux@F1.2, AGC ON
Lens Mount		C/CS
Wide Dynamic Range		Digital WDR
BLC		Yes
HLC		Yes
Defog		Yes
Digital NR		3D DNR
Image		
Video Compression		Main stream: H.265 / H.264; Sub stream: H.265 / H.264 / MJPEG
H.264 Compression Standard		Baseline Profile/Main Profile/High Profile
Resolution		1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream		60Hz: 1080P(1~30fps) / 720P(1~30fps) 50Hz: 1080P(1~25fps) / 720P(1~25fps)
Sub Stream		60Hz: D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)
Bit Rate		128 Kbps ~ 6 Mbps
Bit Rate Type		VBR / CBR
Audio Compression		G711A / U
Image Settings		ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
Interfaces		
Network		RJ 45
Alarm		1CH alarm input; 1CH alarm output
Audio		1CH audio input; 1CH audio output
RS 485		Yes
Storage		Support SD card slot; up to 128GB
Reset		Yes
Functions		
Remote Monitoring		Web browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol		UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPs, HTTP, QoS
Interface Protocol		ONVIF, GB-T/28181-2016
Storage		Network remote storage; SD card storage
Intelligent Analytics		Video blur detection, intrusion detection and line crossing detection
Smart Alarm		Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection
General function		Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE		Yes
Others		
Power Supply		AC24V/DC12V/PoE
Power Consumption		< 4W

Operating Environment	- 30 °C ~ 40 °C (-22°F~104°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	138.4 × 70 × 60.5
Weight (net)	Approx. 0.39KG
Installation	Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

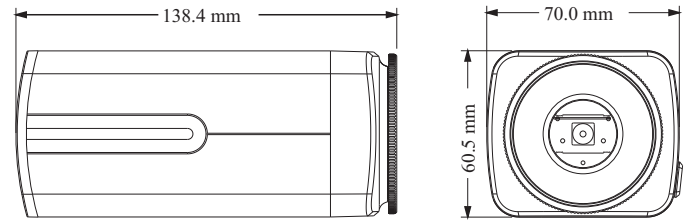

AVAILABLE ACCESSORIES

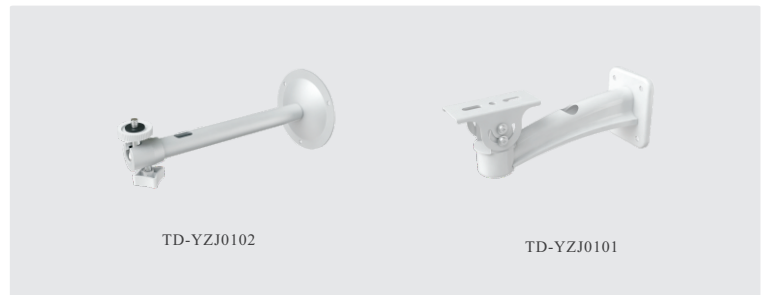

AVAILABLE MODEL

Available Model	TD-9322S3H(D/PE)
-----------------	------------------