


TD-9482S3

8MP IR Water-proof Bullet Network Camera



- 8MP (3840 × 2160) H.265 coding
- Max.resolution: 3840 × 2160
- ICR auto switch, true day / night, ROI coding
- 3D DNR, WDR, HLC, BLC, defog
- 30~50m IR night view distance
- DC12V/PoE power supply
- P2P function optional
- IP 67 ingress protection
- Support three streams
- Support mobile surveillance by smart phones with iOS or Android OS
- Intelligent analytics

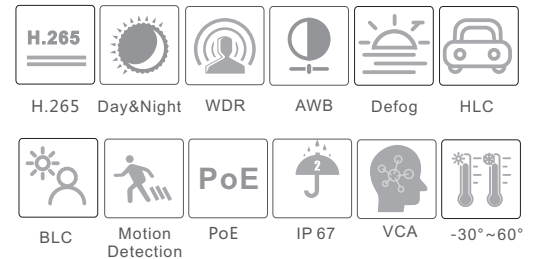

en.tvt.net.cn

For more information, please visit our website


SPECIFICATIONS

| Specifications | Model | TD-9482S3 |
|----------------------------|-------|--|
| Camera | | |
| Image Sensor | | 1 / 2.7 "CMOS |
| Image Size | | 3840 × 2160 |
| Electronic Shutter | | 1 / 25 s ~ 1 / 100000 s |
| Iris Type | | Fixed Iris |
| Min. Illumination | | 0.11 lux @F2.2, AGC ON; 0 lux with IR 0.032 lux @ F1.2, AGC ON; 0 lux with IR |
| Lens | | 2.8 mm @F2.0, (fixed lens) , horizontal field of view: 112° 3.6 mm @F2.2, (fixed lens) , horizontal field of view: 89° 2.8~12mm@F1.4, (motorized zoom lens) , horizontal field of view: 102.7°~32.2° |
| Lens Mount | | M12 or Φ14 optional |
| Wide Dynamic Range | | Digital WDR |
| BLC | | Yes |
| HLC | | Yes |
| Defog | | Yes |
| Digital NR | | 3D DNR |
| Angle Adjustment | | Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360° |
| Image | | |
| Video Compression | | H.265 / H.264 |
| H.264 Compression Standard | | Baseline Profile/Main Profile/High Profile |
| Resolution | | 8MP (3840 × 2160), 6MP (3072 × 2048), 5MP (2592 × 1944), 720P (1280 × 720), D1, CIF, 480 × 240 |
| Main Stream | | 8MP/ 6MP/ 5MP(1~20fps) |
| Sub Stream | | 720P/D1/CIF(1~20fps) |
| Third Stream | | D1/CIF/480x240(1~20fps) |
| Bit Rate | | 64 Kbps ~ 8 Mbps |
| Bit Rate Type | | VBR / CBR |
| Audio Compression | | G711A / U |
| Image Settings | | ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser |
| ROI | | Each ROI to be configured separately |
| Interfaces | | |
| Network | | RJ45 |
| Video Output | | No |
| Audio | | 1CH audio input |
| Storage | | Built-in micro SD card slot; up to 128GB |
| Hardware Reset | | Yes |
| Functions | | |
| Remote Monitoring | | Web browsing, CMS remote control |
| Online Connection | | Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission |
| Network Protocol | | UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS |
| Interface Protocol | | ONVIF |
| Storage | | Network remote storage, micro SD card storage |
| Smart Alarm | | Motion detection, SD card error, SD card full |
| Intelligent Analytics | | Region intrusion detection, scene change detection and line crossing detection |
| General Function | | Watermark, IP address filtering, video mask, heartbeat, illegal login lock |
| PoE | | Yes |
| IR Distance | | 30 ~ 50 m |
| Ingress Protection | | IP 67 |

Others

| | |
|-----------------------|--|
| Power Supply | DC12V/PoE |
| Power Consumption | < 9.5W |
| Operating Environment | - 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing) |
| Dimensions (mm) | 217.7 × 80.5 × 80.5 |
| Weight (net) | Approx. 0.66KG |
| Installation | Ceiling mounting; Wall mounting |

DIMENSIONS

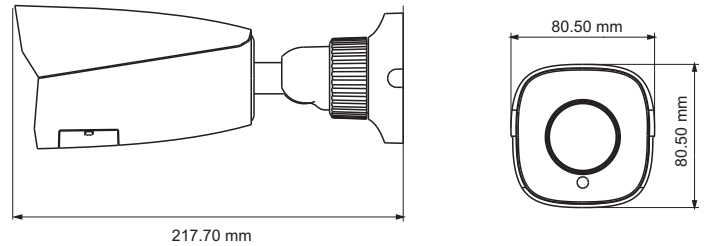

AVAILABLE ACCESSORIES



AVAILABLE MODEL

| | | |
|-----------------|------------------------|---------------------|
| Available Model | TD-9482S3(D/PE/AR3) | Fixed lens |
| | TD-9482S3(D/AZ/PE/AR3) | Motorized zoom lens |