


TD-A608E-S

All-in-One Server

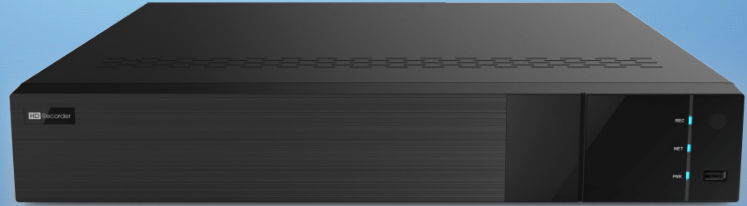

Based on the conception of "All-in-One", A608E-S is a management server specially designed and developed for security surveillance application. Its software is installed before delivery and combines management, video preview and intelligent applications. Due to its low cost, simple deployment, flexible expansion, powerful performance and high reliability, it can meet the requirements of the medium and small-sized security systems.

Shenzhen TVT Digital Technology Co., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China

Tel: +86-755-36995888

Website: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn

Features

Device Access

- Supports TVT private protocol, ONVIF protocol, standard RTSP, SDK
- Supports adding devices by manually entering IP address, domain name or IP range, by auto search, or by auto report
- Setting the network of the devices before quick adding them

Resource Management

- Supports channel (or camera) group management and device area management
- Supports centralized management of decoding devices, encoding devices and platform services

Device Configuration

- Supports the basic configuration and user management of the devices
- Supports the date, time and time zone, network, email and DDNS configuration of the devices
- Supports getting the information of the device's HDDs
- Supports multi-OSD setup of one channel
- Supports the camera's ROI, video mask and motion detection settings
- Supports intelligent analytics
- Supports the camera's resolution, frame rate, VBR/CBR, image quality and bitrate settings
- Supports the camera's brightness, contrast, saturation, hue, AZ settings, etc.
- The parameters of multiply devices can be set at one time
- Supports configuring record plan for storage devices

User Management

- Supports multi-user talk
- Supports user MAC address binding
- Supports user lock
- Supports different users and permission
- Supports permission based on resources and operation
- Permission can be assigned to each channel (or camera) of the device

Snapshots

- Supports snapshots in the live view mode and playback mode
- Supports triggering camera snapshot

Live View

- Supports multi-screen display mode:
Supports 1/4/6/8/9/10/16/117/21/25/33/36/49/64/84/100 standard screen display mode
Supports 2/4/6/7/9/12/16/24/36/48 widescreen display mode
- Supports customized screen display mode
- Supports corridor mode
- Supports adding fisheye and panoramic cameras
- Supports channel group auto-switch
- Supports stream self-adaption and one-key stream switch
- Supports steam copy
- Supports multi-monitor display
- Supports instant playback
- Supports decoding with hardware
- Supports device's smart area and result display

Two-way Talk and Broadcast

- Supports remote listening
- Supports two-way talk
- Supports 8K or 16K audio sampling rate
- Supports multiply audio formats: G.711 a-law, G.711 u-law, G.722.1, G.726, ACC, MP2L2, PCM
- Supports voice broadcast and audio file customization

PTZ Control

- PTZ remote control, including preset, track and cruise calling and settings
- Supports zoom in/out and focus+/-
- Supports PTZ protocol configuration
- Supports 3D positioning control (the target can be quickly positioned and captured by box selection)
- Support scheduled tasks, one-button guard and one-button cruise configurations

Record Playback and Backup

- Supports multi-channel simultaneous and asynchronous playback
- Supports multiple record source playback
- Supports multi-window playback
- Supports playback by channel, time slice, time, tag and event search
- Supports playback by frame, dragging the progress bar, fast forward or slow speed
- Supports record backup: manual backup, scheduled backup, backup by channel, time, tag and event search; supports cutting records and backup in the playback interface

Alarm

- Supports multiple alarm types: Motion alarm, sensor alarm, smart event linkage alarm, line crossing counting linkage alarm, face match linkage alarm, etc.
- Supports multiple alarm linkages: Platform recording, client message pop-up, client preview, audio, decoding on TV Wall, device recording, device snapshot, local recording, local snapshot and so on
- Supports arming or disarming.
- Supports SOP (alarm handling process) configuration
- Supports alarm information export by time period
- Supports manual alarm output

Decoding On TV Wall

- Supports working with decoders or decoding matrix to control multiple video walls
- Supports 12MP/ 8MP/5MP/4MP/3MP/1080P/720P
- Supports decoding on TV wall in the audio format of G.722, G.711A, G.711U or ACC
- Support live view and playback on TV wall
- Supports 1/4/9/16/25/36 screen mode
- Supports window merging and splitting, opening window and roaming
- Supports multiple splicing modes: 1x1, 1x2, 2x1, 2x2, 3x1, 3x2, 3x3, 4x1, 4x2, 4x3, 4x4, 4x5, 4x6, 4x7, 4x8
- Supports picture-in-picture mode and roaming mode
- Up to 999 plans configurable
- Supports channel group and plan sequence view
- Plan task configurable
- Supports triggering decoding on TV wall; customized alarm window (unlimited)
- Supports notification for node offline

Line Crossing Counting

- Supports the threshold settings of people/motor vehicle/non-motor vehicle entering and exiting
- Supports daily, monthly people/motor-vehicle/non motor vehicle flow display by chart
- Supports historical people/motor vehicle/non-motor vehicle counting displayed in a histogram or curve graph and exported to an Excel
- Supports single/multi-channel real-time statistics and daily/monthly/yearly statistics via E-map
- Historical data searched by single/multi-channel, time period and line crossing and exported to a curve graph or histogram, or an Excel

Electronic Map

- Supports Baidu map and picture map. The picture map supports JPG, BMP, PNG and TIF formats
- Supports multi-level maps; adding, modifying, moving, deleting hot spots (monitoring points, sensor)
- Supports layer edition and display as well as self-defined layer
- Supports alarm linkage, like icon flickering, video pop-up

Face Surveillance

- Support batch adding and importing face pictures; people attribution information configurable
- The match boxes of strangers and people from allow list and block list are displayed with different colors.
- Supports alarm popup-window after face capture or match
- Supports image search and playback by face image (captured face image or uploaded face picture) and all searched face images can be viewed via the list or track on the E-map
- Supports one-key adding the captured picture to the face database in the image search interface
- Supports the similarity setting of face search
- One-key exporting face pictures of face database

Face Attendance

- Attendance time configurable
- Supports displaying the employee's photo and the compared time on the right panel after successful comparison
- Supports multi-screen display mode (1/4/9/16); the face attendance video can be projected onto a sub-screen
- The attendance record can be viewed and filtered by day, week, month, working day/ non-working day/late/leaving early/overtime working/normal working/check-in /no check-in
- Supports displaying attendance status and overtime working status in the form of a list, which can be exported to an Excel

Face Greeting

- Supports self-defining the style and other configuration items of the greeting interface
- Real-time visitor information display on the client
- The VIP visitor's photo will be shown on the pop-up window of the sub-screen and the corresponding audio will be broadcast simultaneously
- Single visitor loop play time can be configured in seconds
- Greeting pop-up window quantity, height and duration configurable
- Support visitor access records search

Parking Lot Management

- ANPR camera access
- Total/remaining space display
- Barrier gate control, manual/auto opening
- Historical vehicle entering or exiting information search
- Adding, modifying and deleting vehicle information and their parking permission
- Entrance/exit lane configuration
- Overstaying parking search and self-defining overstaying threshold
- Block list management (adding, modifying and searching vehicles to /in the block list)

Others


- Supports keyboard control
- Supports overload protection
- Supports operation and maintenance management:
- Operating, system and alarm logs can be searched and exported by time, type and user

Specifications

Model		TD-A608E-S	
System	CPU	Apollo-Lake J3455	
	Memory	4GB	
	EMMC	64GB DDR3L	
	Operation System	Linux	
Software	Software	NVMS standard	
	Decoding Capability	2CH 8MP or 3CH 5MP or 5CH 4MP or 6CH 1080P or 15CH 720P or 22CH D1 or 26CH CIF	
	Incoming Bandwidth	256Mbps	
	Outgoing Bandwidth	256Mbps	
	Storage Bandwidth	256Mbps	
	Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25/ 30fps	
	Max. Number of Channel Access	128CH	
	Max. Number of Device Access	32NVRs/FR Servers	
	AI Capability	Support the integrated management of face detection IPCs, face match servers, face recognition terminals, face match NVRs, ANPR cameras	
		Support face detection, image search by face image, track playback, allow list and block list alarm as well as stranger alarm	
		Support face attendance, face greeting, people counting, parking lot management	
	Access	Support local GUI access; external mouse, keyboard and monitor; multi-monitor display	
	Protocol	Private protocol, SDK, ONVIF, RTSP,	
	Live View	Support multi-screen display mode; support customized screen display mode, corridor mode, channel group auto-switch, stream self-adaption, manual record and snapshot	
Record Playback	Support search record by time period, time slice, time and tag; support synchronous or asynchronous playback; support record backup		
Alarm Linkage	Support triggering message popup, audio, live view window, recording with tag, decoding on TV Wall		
PTZ Control	zoom in, zoom out, preset, cruise, 3D control		
Storage	HDD Interface	SATA x 8, up to 12TB for each HDD	
Video & Audio	HDMI Output	2CH HDMI @ 4K	

	VGA Output	1 VGA @ 1080P
	Audio Output	2CH
	Audio Input	2CH
External Interface	Ethernet Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet ports
	USB Interface	3 USB ports: USB 3.0x1, USB 2.0x2
	Wi-Fi	1xM.2 2230 (optional)
Others	Power	ATX250W
	Power Consumption	≤15W (without HDDs)
	Working Temperature	-5℃--+60℃
	Working Humidity	10%--95%
	Dimensions	445mm(W)×436mm(H)×90mm(D)

Dimensions

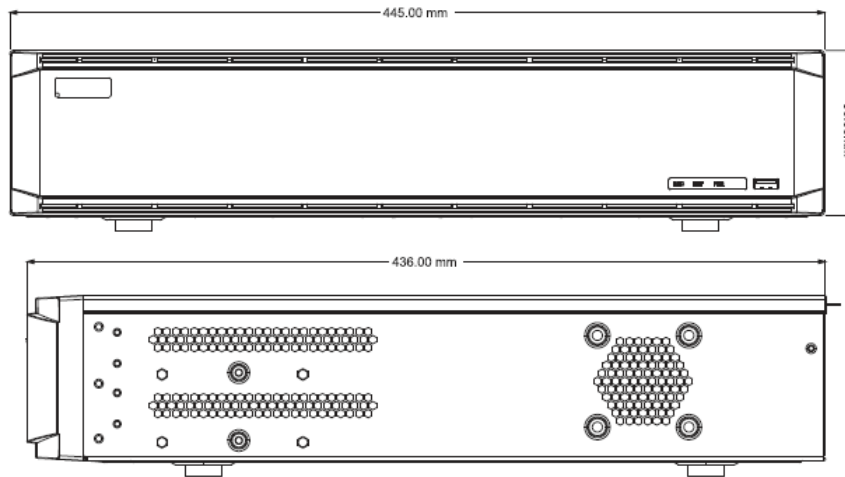

Typical Application

