

**TVT**

**Secure The World With You**

**[www.tvt.net.cn](http://www.tvt.net.cn)**



**TD-9821E2**

**2 MP Network Camera**

**TVT**

**TVT DIGITAL TECHNOLOGY CO., LTD.**

**Address: 5F, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China 518057**


**Tel: +86-755-3330 6001**

**Fax: +86-755-3330 6002**

**Web site: [www.tvt.net.cn](http://www.tvt.net.cn)**

**E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)**


## 2 MP Network Camera



## Features

- 2MP ( 1920 × 1080 ) full real time coding
- Max. resolution: 1920 × 1080
- Support H.265, H.264 and MJPEG encoding
- Support Micro SD card local image / video storage, alarm pre-recording, auto recycle writing, auto uploading and breakpoint resuming
- Support BLC, HLC, true WDR and image flip
- Support three streams
- Support corridor mode / digital image stabilization / privacy mask / scene mode setting
- Support ROI coding

## Dimensions

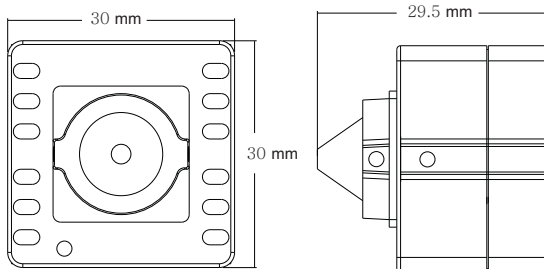

## Specifications

Specifications	Model	TD-9821E2
<b>Camera</b>		
Image Sensor		1 / 3 "CMOS
Image Size		1920 × 1080
Iris		Fixed iris
Min. Illumination		Color: 0.1 Lux@F1.2; B / W: 0.01 Lux@F1.2
Lens		4.3 mm HD pinhole lens
Day & Night		Yes
Wide Dynamic Range		120dB
Digital NR		3D DNR
BLC		Yes
HLC		Yes
Angle Adjustment		Adjusted by its support
<b>Image</b>		
Video Compression		H.265 / H.264 / MJPEG
H.264 Compression Standard		Baseline Profile / Main Profile / High Profile
Resolution		1080P ( 1920×1080 ), 720P ( 1280×720 ), D1
Multi-stream Frame Rates		1080P ( 1 ~ 30fps ) / 720P ( 1 ~ 30fps ) / D1 ( 1 ~ 30fps )
Bit Rate		32 Kbps ~ 16 Mbps
Encode Mode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		Yes
<b>Interfaces</b>		
Network		RJ45
Audio		One built-in microphone
Video Output		1Vp-p Composite(Output 75Ω/BNC)
Storage Card		Up to 128GB
<b>Functions</b>		
Remote Monitoring		IE browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol		ONVIF, GB-T/28181-2011
Image Snapping		JPEG encoding; image quality adjustable
<b>Others</b>		
Power Supply		DC12V
Power Consumption		<3.5W
Operating Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions ( mm )		30 × 30 × 29.5
Weight ( net )		97g
Installation		Hung by the wall or installed with its support

## Available Model

Available Model	TD-9821E2 ( D )
-----------------	-----------------