

TD-9483E3

8MP Network IR Water-Proof Bullet Camera



- Max.resolution: 8MP (3840 × 2160) @30fps
- Smart H.265/H.264 coding
- ICR auto switch, true day / night vision
- 50 ~ 70m IR night view distance; Motorized zoom lens
- 3D DNR, true WDR, HLC, BLC and ROI coding
- Support NIR and image distortion correction
- One CVBS output
- 1CH audio input and 1CH audio output
- Built-in micro SD card slot, up to 256GB
- 1CH alarm input; 1CH alarm output
- DC12V/PoE power supply
- IP67 protection grade
- Support three streams
- P2P function optional
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics



en.tvt.net.cn


For more information, please visit our website

SPECIFICATIONS

Model	TD-9483E3
Specifications	
Camera	
Image Sensor	1 / 1.8" CMOS
Image Size	3840×2160
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	DC Iris
Min. Illumination	0.01 lux @F1.5, AGC ON; 0 lux with IR 0.008 lux @ F1.2, AGC ON; 0 lux with IR
Lens	2.8 mm~12mm@F1.5, motorized lens;
Field of View	Horizontal : 96°~45.6°; Vertical: 64°~26.6°; Diagonal: 103.8°~51.5°
Lens Mount	Φ14
Day & Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Image	
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	8MP (3840 × 2160), 6MP(3072 × 2048), 5MP(2592 × 1944), 4MP(2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	60Hz : 8MP/6MP/5MP/4MP/2K/3MP/1080P/720P(1~30fps) 50Hz : 8MP/6MP/5MP/4MP/2K/3MP/1080P/720P(1~25fps) HFR Mode: 60Hz:1080P/720P(1~60fps); 50Hz:1080P/720P(1~50fps)
Sub Stream	60Hz : 1080P/ 720P/D1/480 × 240 (1~30fps); 50Hz: 1080P/ 720P/D1/480 × 240 (1~25fps)
Third Stream	60Hz : 720P/D1/CIF/480 × 240 (1~30fps); 50Hz: 720P/D1/CIF/480 × 240(1~25fps)
Bit Rate	64 Kbps ~ 12 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Intelligent Analytics (Smart Events)	
Perimeter Protection	Line crossing, region entrance/exiting/intrusion (human/motor vehicle/non-motor vehicle classification)
Target Counting	Line crossing human/motor vehicle/non-motor vehicle counting
Exception Detection	Scene change, video blur and video color cast detection
Face Detection	Face detection and face capture
General Intelligence	Crowd density detection, heat map, object abandoned/missing detection*
Interfaces	
Network	RJ45
Video Output	CVBS output (BNC × 1)
Audio	1CH audio input; 1CH audio output
Storage	Built-in micro SD card slot; up to 256GB
Reset	Yes
Alarm	1CH alarm input; 1CH alarm output
Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage

Smart Alarm	Motion detection; Sensor alarm; SD card error; SD card full; IP conflict; Network disconnection
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, image distortion correction, NIR, etc.
PoE	Yes
IR Distance	50 ~ 70 m
Ingress Protection	IP 67
Others	
Power Supply	DC12V/PoE
Power Consumption	< 9.5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	279.5 × 100.3 × 88.9
Weight (net)	Approx. 1.04KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

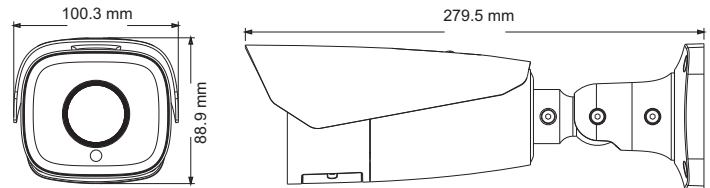

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9483E3(D/AZ/PE/AR5)	Motorized zoom lens
-----------------	------------------------	---------------------